

Autotransformer AIM 16/8



Picture shows AIM 3,2/1,6


Advantages

- Low weight and small size (compared to isolating transformers)
- Integrated short-circuit and overload protection
- High efficiency
- Very good moisture protection and low noise due to XtraDenseFill resin encapsulation (AIM 1.8/8 - AIM 5.0/2.5)
- Screw terminals under cover with strain relief

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

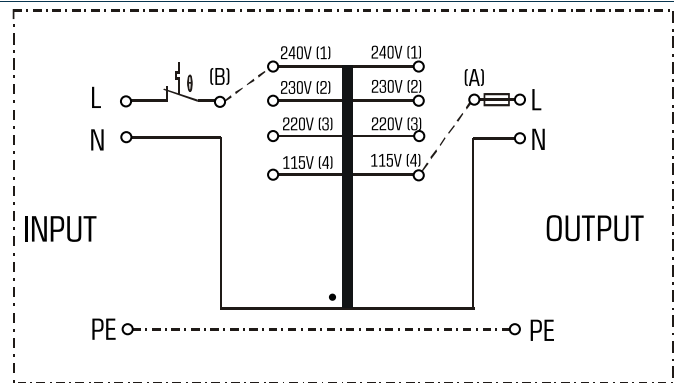

Standards

Autotransformer
to: VDE 0570 Part 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13

Approvals





Autotransformer AIM 16/8

Type		AIM 16/8
Electrical data	Input	
	Rated input voltage	115 Vac/220 Vac/230 Vac/240 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	115 Vac/220 Vac/230 Vac/240 Vac
	Rated output current	8,00 A (PRI 115/ SEC 220-240); 16,00 A (PRI 220-240/SEC 115-240)
	No-load loss (typ.)	21 W
	Environment	
	Ambient temperature max.	104.0 °F
	Safety and protection	
Type	Enclosed	
Insulation class	B	
Protection index	IP 20	
Safety class	I	
Short circuit strength	non-inherently short-circuit proof	
Order numbers		
Order Number	AIM 16/8	

Type		AIM 16/8
Mechanical data	Terminal and mounting	
	Fixing method	Fixing holes in the housing
	Terminals	Screw-type terminal
	Measures and weights	
	Weight	36.38 lbs

Dimensions in inch

