

Safety isolating transformer

FLD 35/8



FLD 12/8


Advantages

Minimum size at high output
Low height
Integrated overload protection using PTC in the input
Double input voltage for series or parallel connection
Double output voltage for series or parallel connection
Permanent corrosion protection, high insulation value and maximum electrical reliability due to XtraDenseFill resin encapsulation
Self-extinguishing potting material Coil shell in 2-chamber technology

Applications

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

Approvals



VDE (EN 61347)




Safety isolating transformer

FLD 35/8

Type		FLD 35/8
Electrical data	Input	
	Rated input voltage	2 x 115 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	2 x 8 Vac
	Power	35 VA
	No-load voltage (app. x factor)	1.20
	No-load loss (typ.)	3.2 W
	Efficiency	78 %
	Standards	
Classification	Safety isolating transformer	
Approvals		
Approvals	VDE	
Environment		
Ambient temperature max.	104.0 °F	
Safety and protection		
Type	Encapsulated	
Insulation class	E	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-inherently short-circuit proof	
Order numbers		
Order Number	FLD 35/8	

Type		FLD 35/8
Terminal and mounting		
Terminals		Pins for printed circuit boards
Measures and weights		
Core type		UI 48/17,0
Weight		1.63 lbs

Dimensions in inch

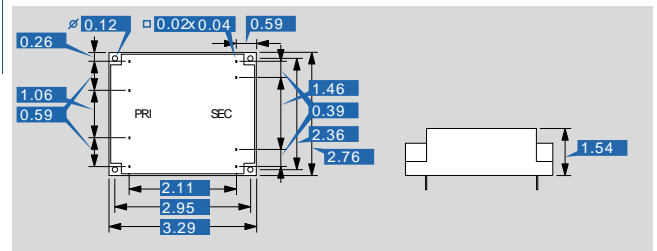

Subject to change.