

Safety isolating transformer VCM 10/1/8



Picture shows VCM 50/1/6

Advantages


- Minimum size at high output
- Dual output voltage for series or parallel connection
- Permanent corrosion protection, high insulation value and maximum electrical reliability due to XtraDenseFill resin encapsulation
- Self-extinguishing potting material
- Additional mounting option with tabs on the housing

Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



VDE, UL 5085-1/-2, CSA 22.2 No.66




Safety isolating transformer

VCM 10/1/8

Type		VCM 10/1/8
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	8 Vac
	Power	10 VA
	No-load voltage (app. x factor)	1.25
	No-load loss (typ.)	1.6 W
	Efficiency	74 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus, VDE
	Environment	
	Ambient temperature max.	104.0 °F
Safety and protection		
Type	Encapsulated	
Insulation class	VDE=B, UL=class 105	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-short-circuit proof	
Order numbers		
Order Number	VCM 10/1/8	

Type		VCM 10/1/8
Terminal and mounting	Fixing method	Fixing points on the case
	Terminals	Pins for PCB
	Measures and weights	
Pin (ø)	0.8 mm	
Core type	EI 48/16,8	
Weight	0.62 lbs	

Dimensions in inch

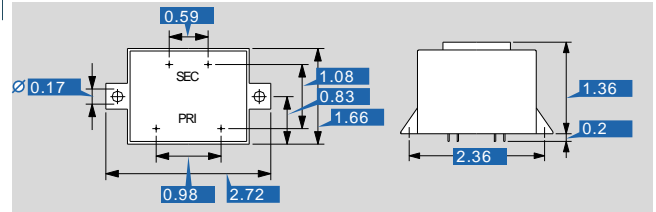

Subject to change.