


# Mains transformer

## AVB 0,5/2/24

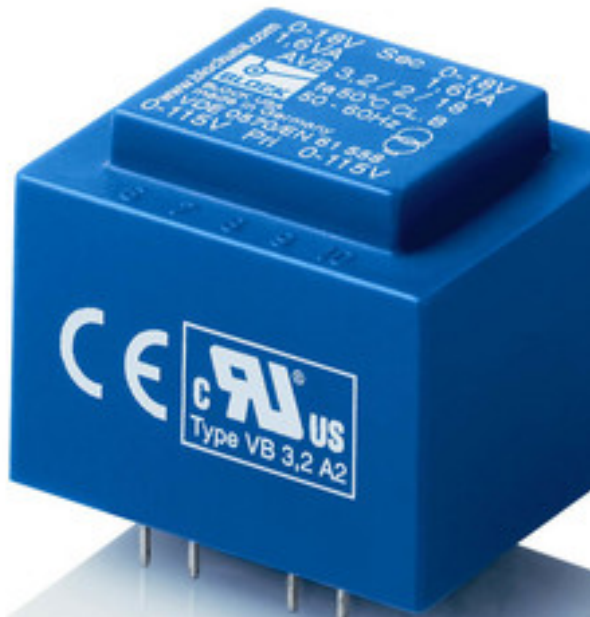

Picture shows AVB 3,2/2/18

## Advantages


Minimum size at high output
Inherently short-circuit proof
Dual input voltage for series or parallel connection
Dual output voltage for series or parallel connection
Designed for high ambient temperatures
Permanent corrosion protection, high insulation value and maximum electrical reliability due to XtraDenseFill resin encapsulation
Self-extinguishing potting and hood material

## Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application




## Standards

Mains transformer  
to: VDE 0570 Teil 2-1, DIN EN 61558-2-1, EN 61558-2-1, IEC 61558-2-1, UL 5085-1/-2, CSA 22.2 No.66

## Approvals



UL 5085-1/-2, CSA 22.2 No.66




# Mains transformer

## AVB 0,5/2/24

Electrical data	
<b>Type</b>	
AVB 0,5/2/24	
<b>Input</b>	
Rated input voltage	2 x 115 Vac
Rated frequency	50 - 60 Hz
<b>Output</b>	
Rated output voltage	2 x 24 Vac
Power	0.5 VA
No-load voltage (app. x factor)	1.80
No-load loss (typ.)	1.1 W
Efficiency	40 %
<b>Standards</b>	
Classification	Mains transformer
<b>Approvals</b>	
Approvals	cURus
<b>Environment</b>	
Ambient temperature max.	158.0 °F
<b>Safety and protection</b>	
Type	Encapsulated
Insulation class	VDE=B, UL=class 105
Protection index	IP 00
Safety class (prepared)	II
Short circuit strength	inherently short-circuit proof
<b>Order numbers</b>	
<b>Order Number</b>	<b>AVB 0,5/2/24</b>

Mechanical data	
<b>Type</b>	
AVB 0,5/2/24	
<b>Terminal and mounting</b>	
Terminals	Pins for printed circuit boards
Pin (ø)	0.6
<b>Measures and weights</b>	
Core type	EE 20/10,5
Weight	0.09 lbs

### Dimensions in inch

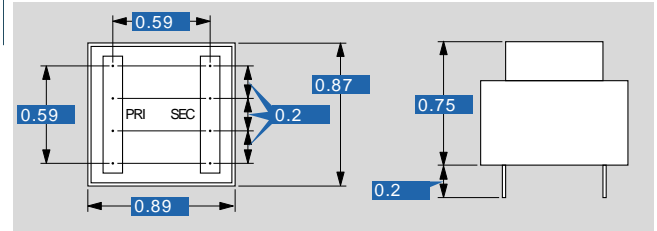

Subject to change.