


Control transformer

BUST 3000/4/23

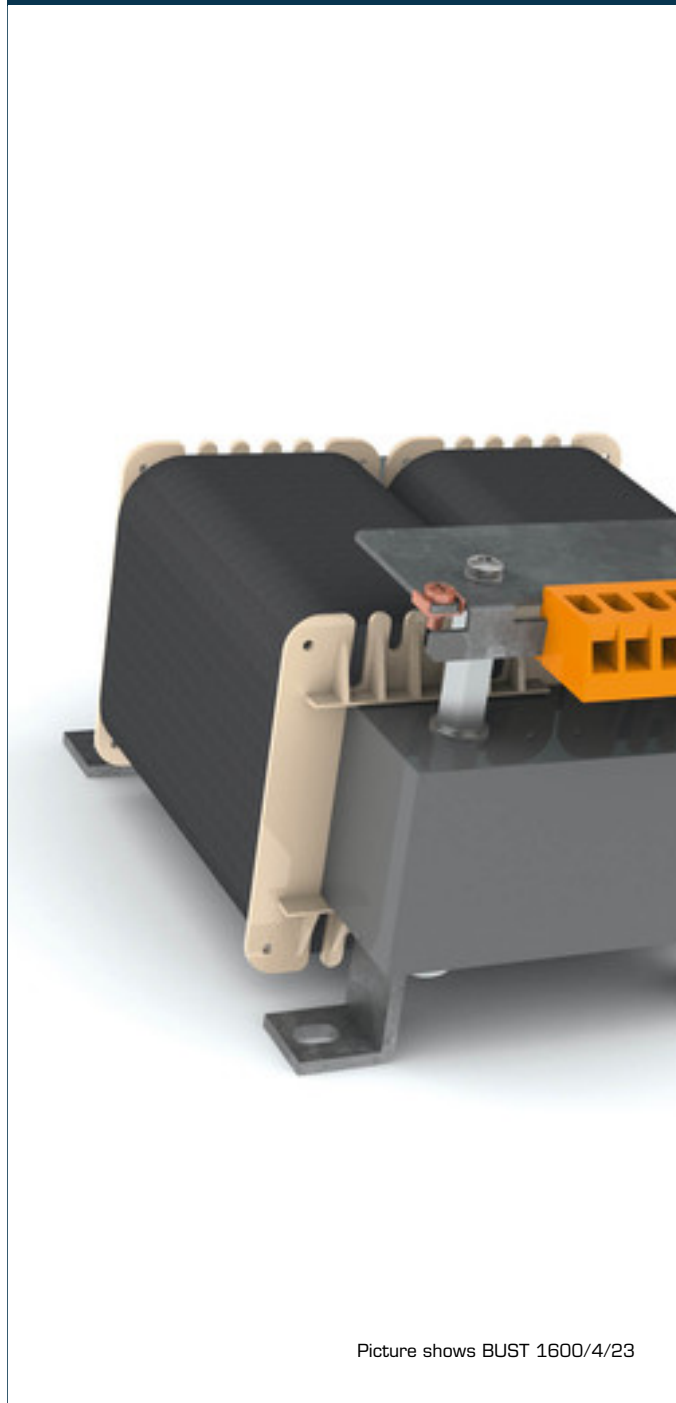

Picture shows BUST 1600/4/23


Advantages

- High power density due to a compact construction design
- Primary side $\pm 5\%$ taps for voltage adjustment
- Very good corrosion protection and low noise due to vacuum impregnation
- Contact protected screw connection terminals complying with UVV BGV A3
- Low height

Applications

Control transformer for the electrical isolation of the input and output sides. The design of the transformer makes it suitable for the supply of control systems complying with VDE 0113.

Sample application



Standards

Control transformer
to: VDE 0570 Teil 2-2, DIN EN 61558-2-2, EN 61558-2-2, IEC 61558-2-2,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



UL 5085-1/-2, CSA 22.2 No.66




Control transformer BUST 3000/4/23

Type		BUST 3000/4/23
Electrical data	Input	
	Rated input voltage	400 Vac
	Tappings Input	±5 %
	Low-inrush current	typ. rated current up to 12 times
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	2 x 115 Vac
	Rated power VDE (DB cos phi=1)	3,000 VA
	Rated power VDE (KB cos phi=0.5)	8,900 VA
	Efficiency	95.3 %
Approvals		
Approvals	cURus	
Environment		
Ambient temperature max.	104.0 °F	
Type of cooling	by self-cooling	
Safety and protection		
Insulation class	VDE=B, UL=class 130	
Protection index	IP 00	
Safety class (prepared)	I	
Type	Open type	
Short circuit strength	non-short-circuit proof	
PRI Fusing recommendation by circuit breaker with tripping characteristic type 20 x I _{rated} related to set)		
Setting range	6.30 - 10.00 A	
Setting value	7.8 A	
Order numbers		
Order Number	BUST 3000/4/23	

Type		BUST 3000/4/23
Mechanical data	Terminal and mounting	
	Fixing method	Fixing rail
	Fixing screws	M6
Terminals	Screw-type terminals	
Measures and weights		
Weight	61.73 lbs	

Dimensions in inch

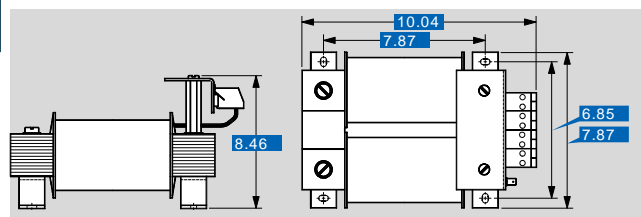

Subject to change.