


## Detuned reactor **DR3 25/14**

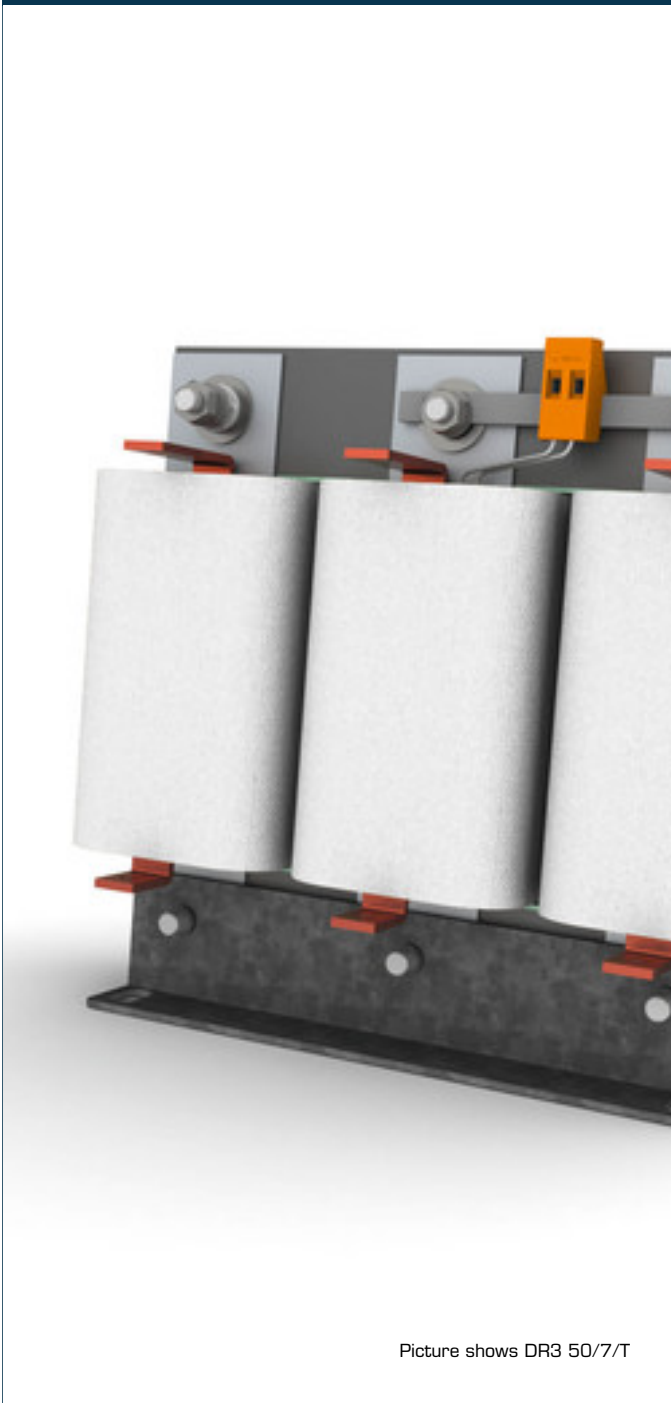

Picture shows DR3 50/7/T

### Advantages

No overloading of the capacitors
Stabilizing mains impedance
Low inductance tolerance
Very good corrosion protection and low noise due to vacuum impregnation
Extended linearity
Thermal design for continuous duty in the event of mains operation and harmonics
Optional with thermal switch

### Applications

Detuned reactor for choking idle reactive power compensation capacitors.

### Standards

Detuning reactor in accordance with EN 61558 Part 1, 61558 Part 20,  
UL 506, CSA 22.2

### Approvals



UL 506, CSA 22.2



# Detuned reactor DR3 25/14

Type		DR3 25/14
<b>Electrical data</b>	<b>Operating data</b>	
	Rated voltage	3 x 400 Vac
	Rated frequency	50 Hz
	Current per phase at 50 Hz (I) for reactive power	36 A
	Inductance linear to (at #95 % L; Im)	25 kVAr
	Inductance per phase (L)	50.4 A
	Tolerance	3.35 mH
	Detuning factor	±3 %
	Temperature control	$\rho = 14 \%$
	Resonance frequency	No
<b>Output</b>		134 Hz
Power loss	165 W	
<b>Approvals</b>		
Approvals	cURus (pending)	
<b>Environment</b>		
Ambient temperature max.	104 °F (140 °F Cl. H)	
<b>Safety and protection</b>		
Type	Open type	
Insulation class	F (104 °F) / H (140 °F)	
Protection index	IP 00	
Safety class (prepared)	I	
Test voltage	2500 Vac, 50 Hz	
<b>Order numbers</b>		
Order Number	DR3 25/14	

Type		DR3 25/14
<b>Mechanical data</b>	<b>Terminal and mounting</b>	
	Fixing method	Fixing rail
	Fixing screws	M8
	Terminals phase	Screw clamp, 10 mm <sup>2</sup>
Connection type	Bolt, M5	
<b>Measures and weights</b>		
Weight	43.65 lbs	

