


1-Channel circuit breaker current-limiting **EB-2824-080-0**

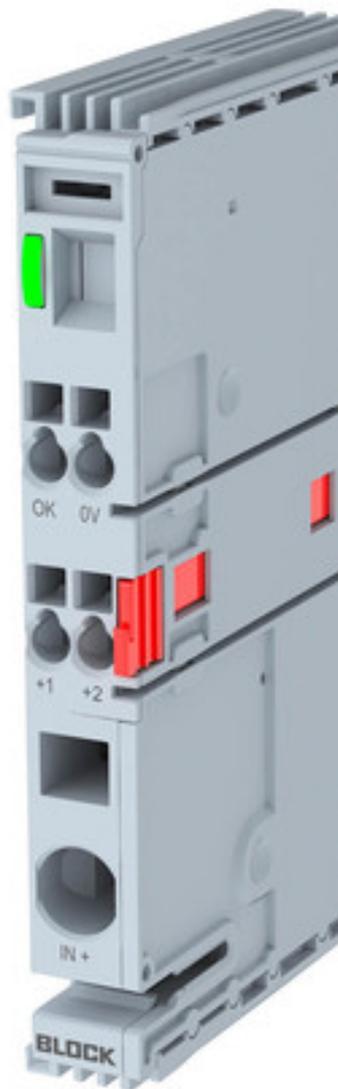

EasyB

Advantages

Automatic channel assignment
Optional undervoltage shutdown in combined network
Additional load outputs through output expanders mountable sidewise
Selective load-dependent activation
3 years warranty

Applications

Electronic circuit breaker with current-limiting characteristic with alarm signal forwarded for tripped and switched off channels to the connected channels. Starter version with fuse for 24 V loads if active current limitation is required.

Standards

Safety:
EN 60950-1, EN 50178, EN/IEC 60204-1
EMC:
EN 61000-6-2 (interference immunity), EN 61000-6-3 (emitted interference)
CE:
Acc. to 2014/30/EU

Approvals




UL 508, UL 2367, DNV GL,
VW eCl@ss No.27-37-18-02 (prepared)



1-Channel circuit breaker current-limiting EB-2824-080-0

Type		EB-2824-080-0
Electrical data	Special features	
	Characteristics	Collective notification signal
	Input	
	Input rated voltage	24 Vdc
	Input voltage range	18 - 30 Vdc
	Maximal residual ripple of supplied input voltage	3 %
	Max. total input current	
	Max. input current for each pole of terminal	10 A (-), 40 A (+)
	Required input voltage for turning-on of outputs	17.5 Vdc (Turn-off Threshold 16.7 Vdc), ± 0.7 Vdc
	Max. power losses	1,3 W
	Over voltage protection	Suppressor diode 33 Vdc
	Stand-by current	18,6 mA @ 24 Vdc
	Power losses in stand-by mode	0,5 W @ 24 Vdc
	Turn on capacity	80 mF
	Output	
	Output rated voltage	24 Vdc
	Maximum voltage drop between input and output	92 mV
	Initialization time of module	52 ms
	Turn-on delay of outputs	0 ms
	Waiting periode after switch-off of an output	500 ms (Short circuit) .. 5 s (Overload)
	Parallel use of outputs	Not allowed
	Serial use of outputs	not allowed
	Resistance to reverse feed max.	35 Vdc
	Output rated current	8 A
	Efficiency	99 %
	Output limited current	typ. 10 A
	Signaling	
	Bus communication	Collective notification signal
	Status indicator	LED (red, green, orange)
	Signal output	Output status, short circuit proof high = Channel on, low = Channel off, fault
Signal output (ON/OFF/Reset)	-	
Environment		
Type of cooling	Natural convection	
Ambient temperature	-25 °C .. 55 °C	
Storage temperature	-13 °F .. +185 °F	
Derating	-	
Relative humidity	5 .. 96 %, without condensation	
Required minimum spacing (left/right)	0.00 inch	
Required minimum spacing (over/under)	1.18 inch	
Safety and protection		
Protection index	IP 20	
Safety class	III, without PE connection	
Degree of pollution	2	
Order numbers		
Order Number	EB-2824-080-0	

Type		EB-2824-080-0
Mechanical data	Terminal and mounting	
	Terminals input, (spring clamp terminal)	max. 16 mm ²
	Terminals output, (spring clamp terminal)	max 2,5 mm ² (2 x "+")
	Terminals signalling, (spring clamp terminal)	max. 2,5 mm ²
	Mounting position	horizontal for standard rail DIN TS35
	Measures and weights	
	Weight	0.09 lbs
	Dimensions in inch	

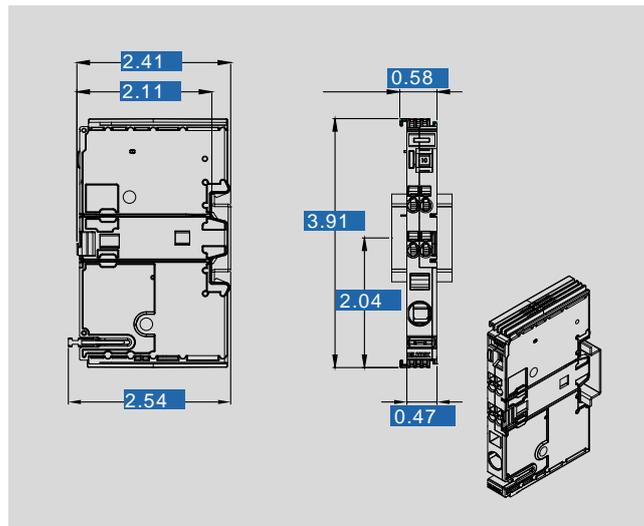

Subject to change.