

Safety isolating transformer ETKEC 200/24



Picture shows ETKEC 100/24, ETKEC 200/42


Advantages

- Integrated short circuit and overload protection
- Very good moisture protection and low noise due to resin encapsulation
- High degree of protection
- Carrying handle, mains connecting lead and CEE socket for mobile use

Applications

Safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application

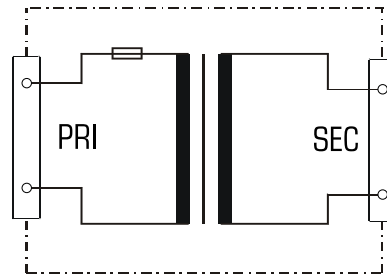

Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

Approvals






Safety isolating transformer

ETKEC 200/24

Type		ETKEC 200/24
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	24 Vac
	Power	200 VA
	Environment	
	Ambient temperature max.	104.0 °F
	Safety and protection	
	Type	Resin encapsulated transformer
	Insulation class	E
	Protection index	IP 44
	Safety class	II
	Short circuit strength	non-inherently short-circuit proof
Test voltage	3750 Vac, 50 Hz	
Order numbers		
Order Number	ETKEC 200/24	

Type		ETKEC 200/24
Terminal and mounting	Terminals Input	Mains connecting cable with safety plug
	Terminals Output	2 CEE-sockets
Measures and weights		
Weight		14.77 lbs
Dimension (W x H x D)		5.51 x 5.71 x 8.66 inch

Dimensions in inch

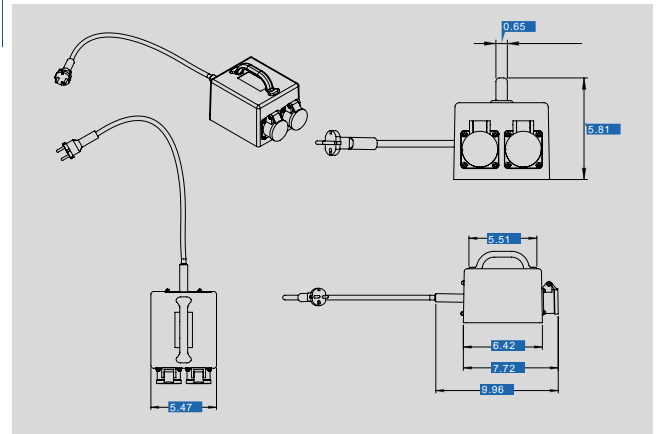

Subject to change.