

Safety isolating transformer

FLE 18/18



Picture shows FLE 35/6


Advantages

Minimum size at high output
Low height
Integrated overload protection using PTC in the input
Double output voltage for series or parallel connection
Permanent corrosion protection, high insulation value and maximum electrical reliability due to XtraDenseFill resin encapsulation
Self-extinguishing potting material

Applications

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application

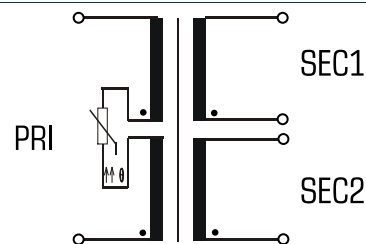

Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

Approvals



VDE



Safety isolating transformer

FLE 18/18

Electrical data	
Type	FLE 18/18
Input	
Rated input voltage	230 Vac
Rated frequency	50 - 60 Hz
Output	
Rated output voltage	2 x 18 Vac
Power	18 VA
No-load voltage (app. x factor)	1.30
No-load loss (typ.)	2 W
Efficiency	75 %
Standards	
Classification	Safety isolating transformer
Approvals	
Approvals	VDE
Environment	
Ambient temperature max.	104.0 °F
Safety and protection	
Type	Encapsulated
Insulation class	E
Protection index	IP 00
Safety class (prepared)	II
Short circuit strength	non-inherently short-circuit proof
Order numbers	
Order Number	FLE 18/18

Mechanical data	
Type	FLE 18/18
Terminal and mounting	
Terminals	Pins for PCB
Measures and weights	
Core type	UI 39/17,0
Weight	0.99 lbs
Dimensions in inch	

Subject to change.