

# Autotransformer JET 250



Picture shows JET 1000

## Advantages

Integrated short-circuit and overload protection

High efficiency


Very good moisture protection and low noise due to XtraDenseFill resin encapsulation

Carrying handle, mains connecting lead NEMA5-15 (USA) and socket for portable application

## Applications

Autotransformer for portable application for the adjustment of the voltage in 110 Vac networks to 230 Vac equipment when no electrical isolation is required.

## Sample application

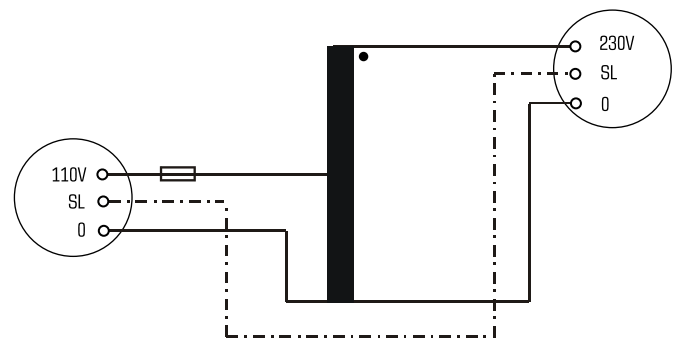

## Standards

Autotransformer  
to: VDE 0570 Part 2-13, DIN EN 61558-2-13, EN 61558-2-13,  
IEC 61558-2-13

## Approvals





# Autotransformer JET 250

Type		JET 250
Electrical data	Input	
	Rated input voltage	110 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	230 Vac
	Power	250 VA
	No-load voltage (app. x factor)	1.04
	Efficiency	94 %
	Environment	
	Ambient temperature max.	104.0 °F
	Safety and protection	
	Type	Resin encapsulated transformer
	Insulation class	A
	Protection index	IP 22
Safety class	I	
Short circuit strength	non-inherently short-circuit proof	
Order numbers		
<b>Order Number</b>	<b>JET 250</b>	

Type		JET 250
Mechanical data	Terminal and mounting	
	Terminals Input	Connecting cable with NEMAS-15 plug (USA)
	Terminals Output	Protective contact socket
	Measures and weights	
	Weight	6.83 lbs

Dimensions in inch

