

Line reactor, three-phase **LR3 40-3/40**



Picture shows LR3 40-4/63

Advantages

| |
|---|
| Use as line reactor, commutating reactor or PFC reactor |
| Ensuring the short-circuit voltage of 3, 4 or 5 % to the mains |
| Power harmonic mitigation |
| Starting current limitation |
| Increases the service life of equipment |
| Low ripple |
| Bridging voltage dips |
| Peak current limitation |
| Very good corrosion protection and low noise due to vacuum impregnation |
| Integrated lifting rings |
| Multifunctional fixing rails |

Applications

Line reactor to minimize mains pollution, to reduce the reactive-power components and charging currents in the DC link capacitor and to improve the cos(phi).

Standards

Line- and commutation reactor to
DIN EN 61558-2-20, IEC 61558-2-20, UL 506, CSA 22.2

Approvals




UL 506, CSA 22.2



Line reactor, three-phase LR3 40-3/40

| Type | | LR3 40-3/40 |
|-------------------------|--------------------------------------|---------------|
| Electrical data | Operating data | |
| | Rated voltage | 3 x 400 Vac |
| | Rated voltage (IEC) | 3 x 690 Vac |
| | Rated voltage (UL) | 3 x 600 Vac |
| | Short circuit voltage u _k | 3 % @ 400 Vac |
| | Voltage drop | 6.9 Vac |
| | Rated current | 3 x 40 A |
| | Rated frequency | 50 - 60 Hz |
| | Inductance | 0.55 mH |
| | Inductance deviation | ±10% |
| | Output | |
| | Power loss | 97.9 W |
| | Approvals | |
| | Approvals | cURus |
| | Environment | |
| Ambient temperature | 14 °F to +104 °F | |
| Type of cooling | AN | |
| Safety and protection | | |
| Type | Open type | |
| Insulation class | IEC=F, UL=class 155 | |
| Protection index | IP 00 | |
| Safety class (prepared) | I | |
| Test voltage | 4000 Vac | |
| Order numbers | | |
| Order Number | LR3 40-3/40 | |

| Type | | LR3 40-3/40 |
|-----------------|-----------------------|---------------------------------|
| Mechanical data | Terminal and mounting | |
| | Terminals phase | Screw clamp, 10 mm ² |
| | Connection type | for M6 |
| | Fixing method | Fixing rail |
| | Fixing screws | M5 |
| | Measures and weights | |
| | Weight | 13.49 lbs |

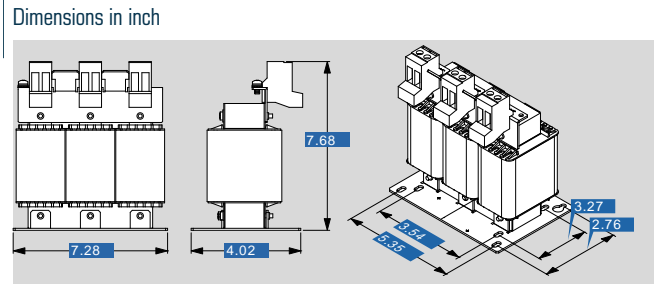

Subject to change.