

Line reactor, three-phase **LR3 40-4/2**



Picture shows LR3 40-4/63

Advantages

Use as line reactor, commutating reactor or PFC reactor
Ensuring the short-circuit voltage of 3, 4 or 5 % to the mains
Power harmonic mitigation
Starting current limitation
Increases the service life of equipment
Low ripple
Bridging voltage dips
Peak current limitation
Very good corrosion protection and low noise due to vacuum impregnation
Integrated lifting rings
Multifunctional fixing rails

Applications

Line reactor to minimize mains pollution, to reduce the reactive-power components and charging currents in the DC link capacitor and to improve the $\cos(\phi)$.

Standards

Line- and commutation reactor to
DIN EN 61558-2-20, IEC 61558-2-20, UL 506, CSA 22.2

Approvals




UL 506, CSA 22.2



Line reactor, three-phase LR3 40-4/2

Electrical data	
Type	LR3 40-4/2
Operating data	
Rated voltage	3 x 400 Vac
Rated voltage (IEC)	3 x 690 Vac
Rated voltage (UL)	3 x 600 Vac
Short circuit voltage uK	4 % @ 400 Vac
Voltage drop	9.2 Vac @ 400 Vac
Rated current	3 x 2 A
Rated frequency	50 - 60 Hz
Inductance	14.7 mH
Inductance deviation	±10%
Output	
Power loss	5.76 W
Approvals	
Approvals	cURus
Environment	
Ambient temperature	14 °F to +104 °F
Type of cooling	AN
Safety and protection	
Type	Open type
Insulation class	IEC=B, UL=class 130
Protection index	IP 00
Safety class (prepared)	I
Test voltage	4000 Vac
Order numbers	
Order Number	LR3 40-4/2

Mechanical data	
Type	LR3 40-4/2
Terminal and mounting	
Terminals phase	Screw clamp, 4 mm ²
Connection type	Tab connector, 6.3 x 0.8 mm
Fixing method	Fixing rail
Fixing screws	M4
Measures and weights	
Weight	1.17 lbs

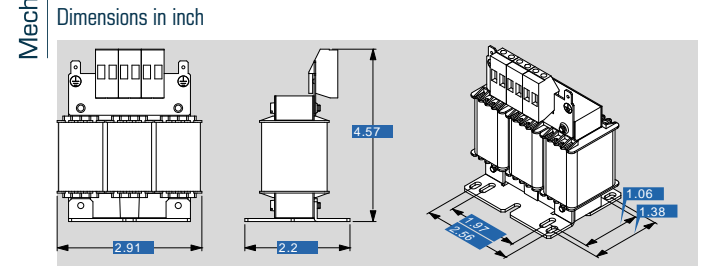

Subject to change.