

Sine filter **SFB-N 400/90**



Picture shows SFB 400/23,5

Advantages

Prevention of overvoltages on the motor
Long cable lengths possible
Reduction in motor noise
Reduction in line-borne and field-borne emitted interference
Reduction in motor losses
Very good corrosion protection and low noise due to vacuum impregnation

Applications

Sine filter for the suppression of differential mode interference.

Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



UL 508, CSA 22.2 No 14-9195




Sine filter SFB-N 400/90

Type		SFB-N 400/90
Electrical data	Operating data	
	Rated voltage	max. 3 x 400 Vac
	Voltage range	0 - 520 Vac
	Voltage drop	10 % @ 400 Vac
	Rated current	90 A
	for motor rated output approx.	60.34 HP
	Rated frequency	0 - 150 Hz
	Switching frequency	4 - 8 kHz
	Approvals	
	Approvals	cURus
	Environment	
	Ambient temperature max.	104.0 °F
	Safety and protection	
	Type	Open type
	Insulation class	H
Protection index	IP 00	
Safety class (prepared)	I	
Test voltage	3000 Vac, 50 Hz	
Order numbers		
Order Number	SFB-N 400/90	

Type		SFB-N 400/90
Mechanical data	Terminal and mounting	
	Terminals phase	Screw clamp, 50 mm ²
	Connection type	Bolt, M8
	Fixing method	Fixing rail
	Fixing screws	M8
Mounting position		only for vertical mounting
Measures and weights		
Weight	116.84 lbs	

Dimensions in inch

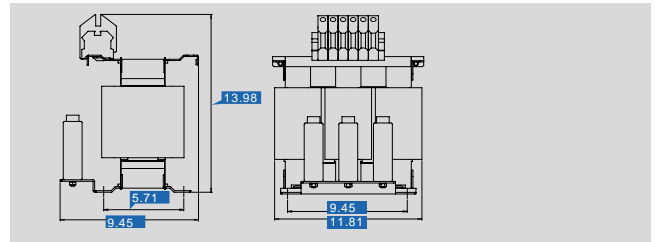

Subject to change.