

# Safety isolating transformer

## VCM 5,0/2/18



Picture shows VCM 50/1/6

## Advantages


- Minimum size at high output
- Dual output voltage for series or parallel connection
- Permanent corrosion protection, high insulation value and maximum electrical reliability due to XtraDenseFill resin encapsulation
- Self-extinguishing potting material
- Additional mounting option with tabs on the housing

## Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application



## Standards

Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,  
UL 5085-1/-2, CSA 22.2 No.66

## Approvals



VDE, UL 5085-1/-2, CSA 22.2 No.66




# Safety isolating transformer

## VCM 5,0/2/18

Type		VCM 5,0/2/18
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	2 x 18 Vac
	Power	5 VA
	No-load voltage (app. x factor)	1.25
	No-load loss (typ.)	1.5 W
	Efficiency	68 %
	Standards	
Classification	Safety isolating transformer	
Approvals		
Approvals	cURus, VDE	
Environment		
Ambient temperature max.	122.0 °F	
Safety and protection		
Type	Encapsulated	
Insulation class	VDE=B, UL=class 105	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-short-circuit proof	
Order numbers		
<b>Order Number</b>	<b>VCM 5,0/2/18</b>	

Type		VCM 5,0/2/18
Mechanical data	Terminal and mounting	
	Fixing method	Fixing points on the case
	Terminals	Pins for PCB
Measures and weights	Pin (ø)	0.8 mm
	Core type	EI 42/14,8
	Weight	0.42 lbs

### Dimensions in inch

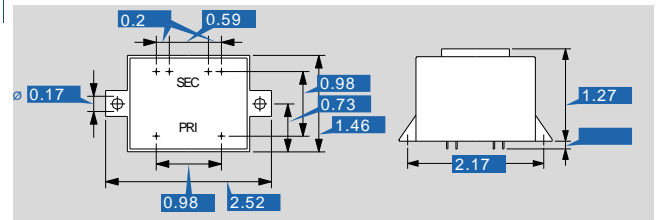

Subject to change.