

# Autotransformer VT 200-EN



Picture shows VT 50-EN


## Advantages

- Low weight and small size (compared to isolating transformers)
- Very high efficiency
- Very good moisture protection and low noise due to vacuum impregnation
- Contact protected screw connection terminals complying with UVV BGV A3
- Simple mounting due to robust metal fixing rail with oval slots

## Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

## Sample application

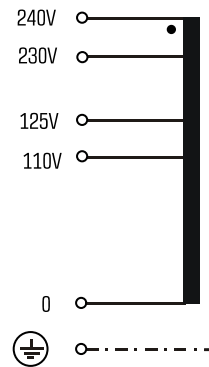

## Standards

Autotransformer  
to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13,  
IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66

## Approvals



UL 5085-1/-2, CSA 22.2 No.66



# Autotransformer VT 200-EN

Type		VT 200-EN
Electrical data	Input	
	Rated input voltage	110 Vac/125 Vac/230 Vac/240 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	110 Vac/125 Vac/230 Vac/240 Vac
	Power	2,000 VA
	Approvals	
	Approvals	cURus
	Environment	
	Ambient temperature max.	104,0 °F
	Safety and protection	
	Type	Open type
	Insulation class	B
	Protection index	IP 00
	Safety class (prepared)	I
Short circuit strength	non-short-circuit proof	
Test voltage	2,500 Vac, 50 Hz	
Order numbers		
<b>Order Number</b>	<b>VT 200-EN</b>	

Type		VT 200-EN
Mechanical data	Terminal and mounting	
	Fixing method	Fixing rail
	Terminals	Screw-type terminal, PE 6.3 x 0.8
Measures and weights		
Weight		31.09 lbs

Dimensions in inch

