

Safety isolating transformer SIM 300



Picture shows SIM 60

Advantages

Integrated short-circuit and overload protection

Dual output voltage for series or parallel connection


Very good moisture protection and low noise due to XtraDenseFill resin encapsulation (up to 300 VA)

Screw terminals under cover with strain relief

Applications

Safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application

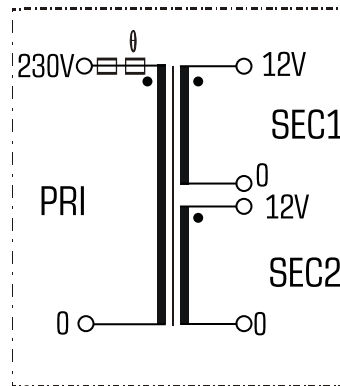

Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

Approvals



VDE




Safety isolating transformer SIM 300

Type		SIM 300
Electrical data	Input	
	Rated frequency	50 - 60 Hz
	Rated input voltage	230 Vac
	Output	
	Rated output voltage	2 x 12 Vac
	Power	300 VA
	No-load voltage (app. x factor)	1.05
	No-load loss (typ.)	14 W
	Efficiency	91 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	VDE
	Environment	
	Ambient temperature max.	104.0 °F
Safety and protection		
Type	Resin encapsulated transformer	
Insulation class	A	
Protection index	IP 20	
Safety class	II	
Short circuit strength	non-inherently short-circuit proof	
Test voltage	5000 Vac, 50 Hz	
Order numbers		
Order Number	SIM 300	

Type		SIM 300
Mechanical data	Terminal and mounting	
	Fixing method	Fixing holes in the terminal connection compartment
	Terminals	Screw-type terminal
	Measures and weights	
	Weight	10.80 lbs

Dimensions in inch

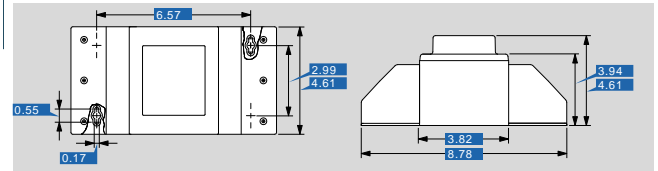

Subject to change.